

Antenna Specifications

At Wavelink, our aim is to provide timely and comprehensive services to our customers. If you require any assistance, please contact our headquarters:

2nd Floor, Building D, No. 88 Tongqiu Road, Zhangpu Town, Kunshan City, Jiangsu Province, China

Tel: +86-512-57449488

Email: sales@kswavelink.com

Wavelink Certifications:



Wavelink Partners:

Skyworth NARI

flex

 **HUAWEI**

 **VVDN**
TECHNOLOGIES

Tenda Infinova

dji

Hikvision

JABIL

Catalogue


1	Product Description	3
2	Product Features	3
3	Product Specifications	3
4	Overall Performance	4
5	Product Size	7
6	Others	8

1 Product Description

This wavelink antenna covers WiFi2.4.

2 Product Features

Easy to install
High efficiency
Removable

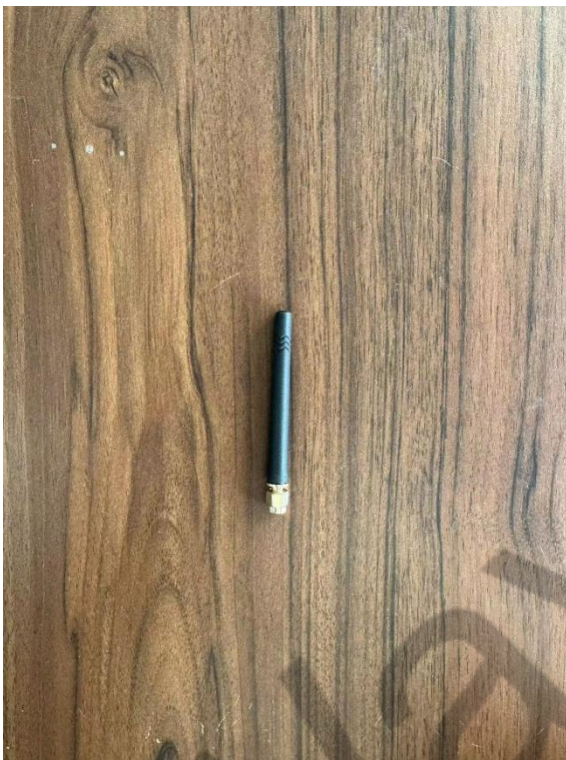

3 Product Specifications

Passive Electrical Specifications

Frequency Range	2400-2500 MHz
Input Impedance	50 Ω
VSWR	≤ 2
Gain	≤ 2 dBi

Polarization Type Linear

Mechanical Specifications

Antenna Size 80mm × 12mm


Connector Type SMA


Working Temperature -40 °C to +85 °C

Radome Color Black


4 Overall Performance

KEYSIGHT VNA Network Analyzer E5071C 100 kHz – 8.5 GHz

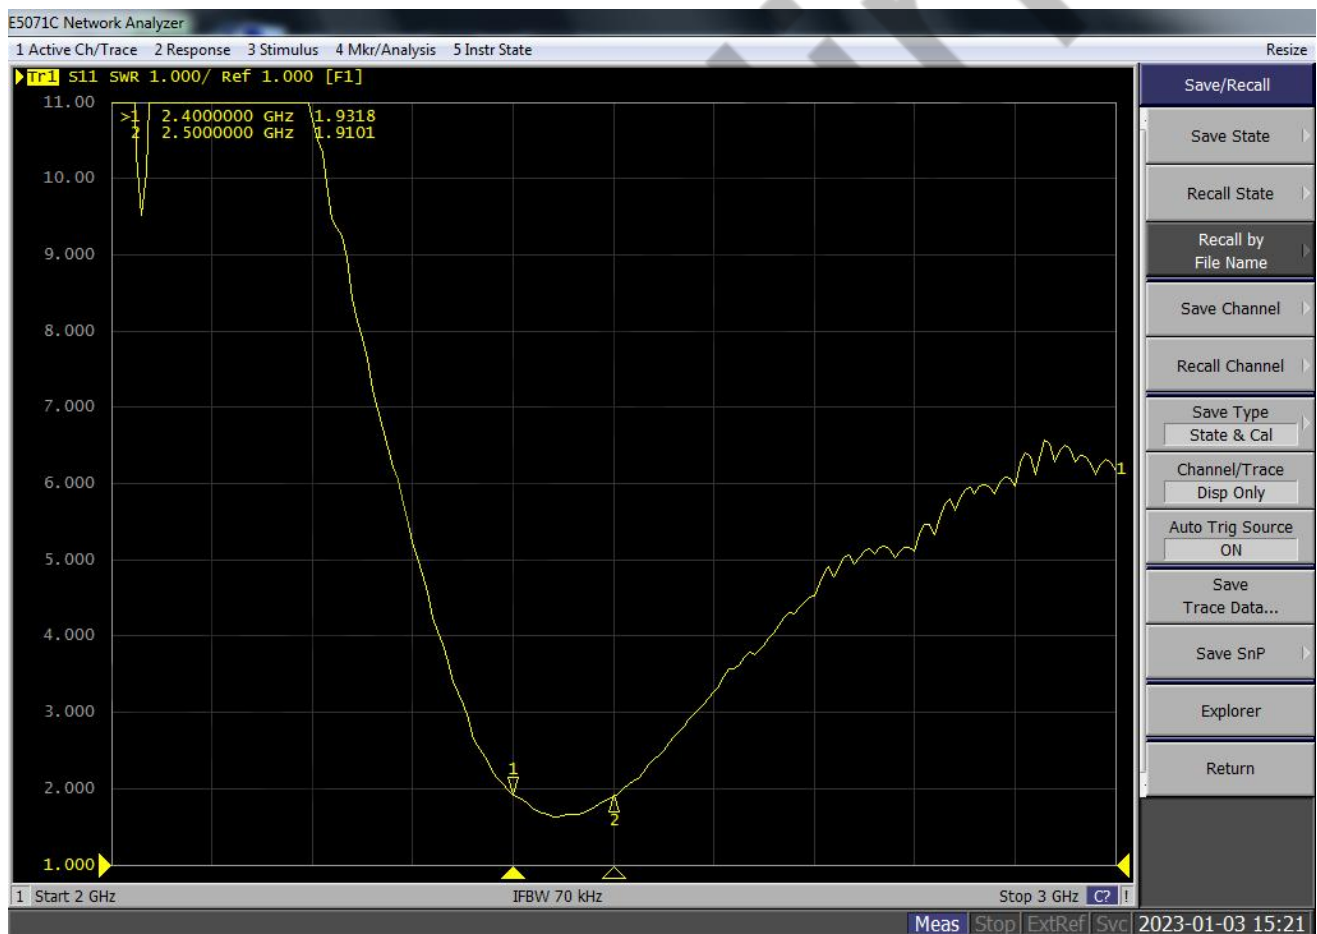


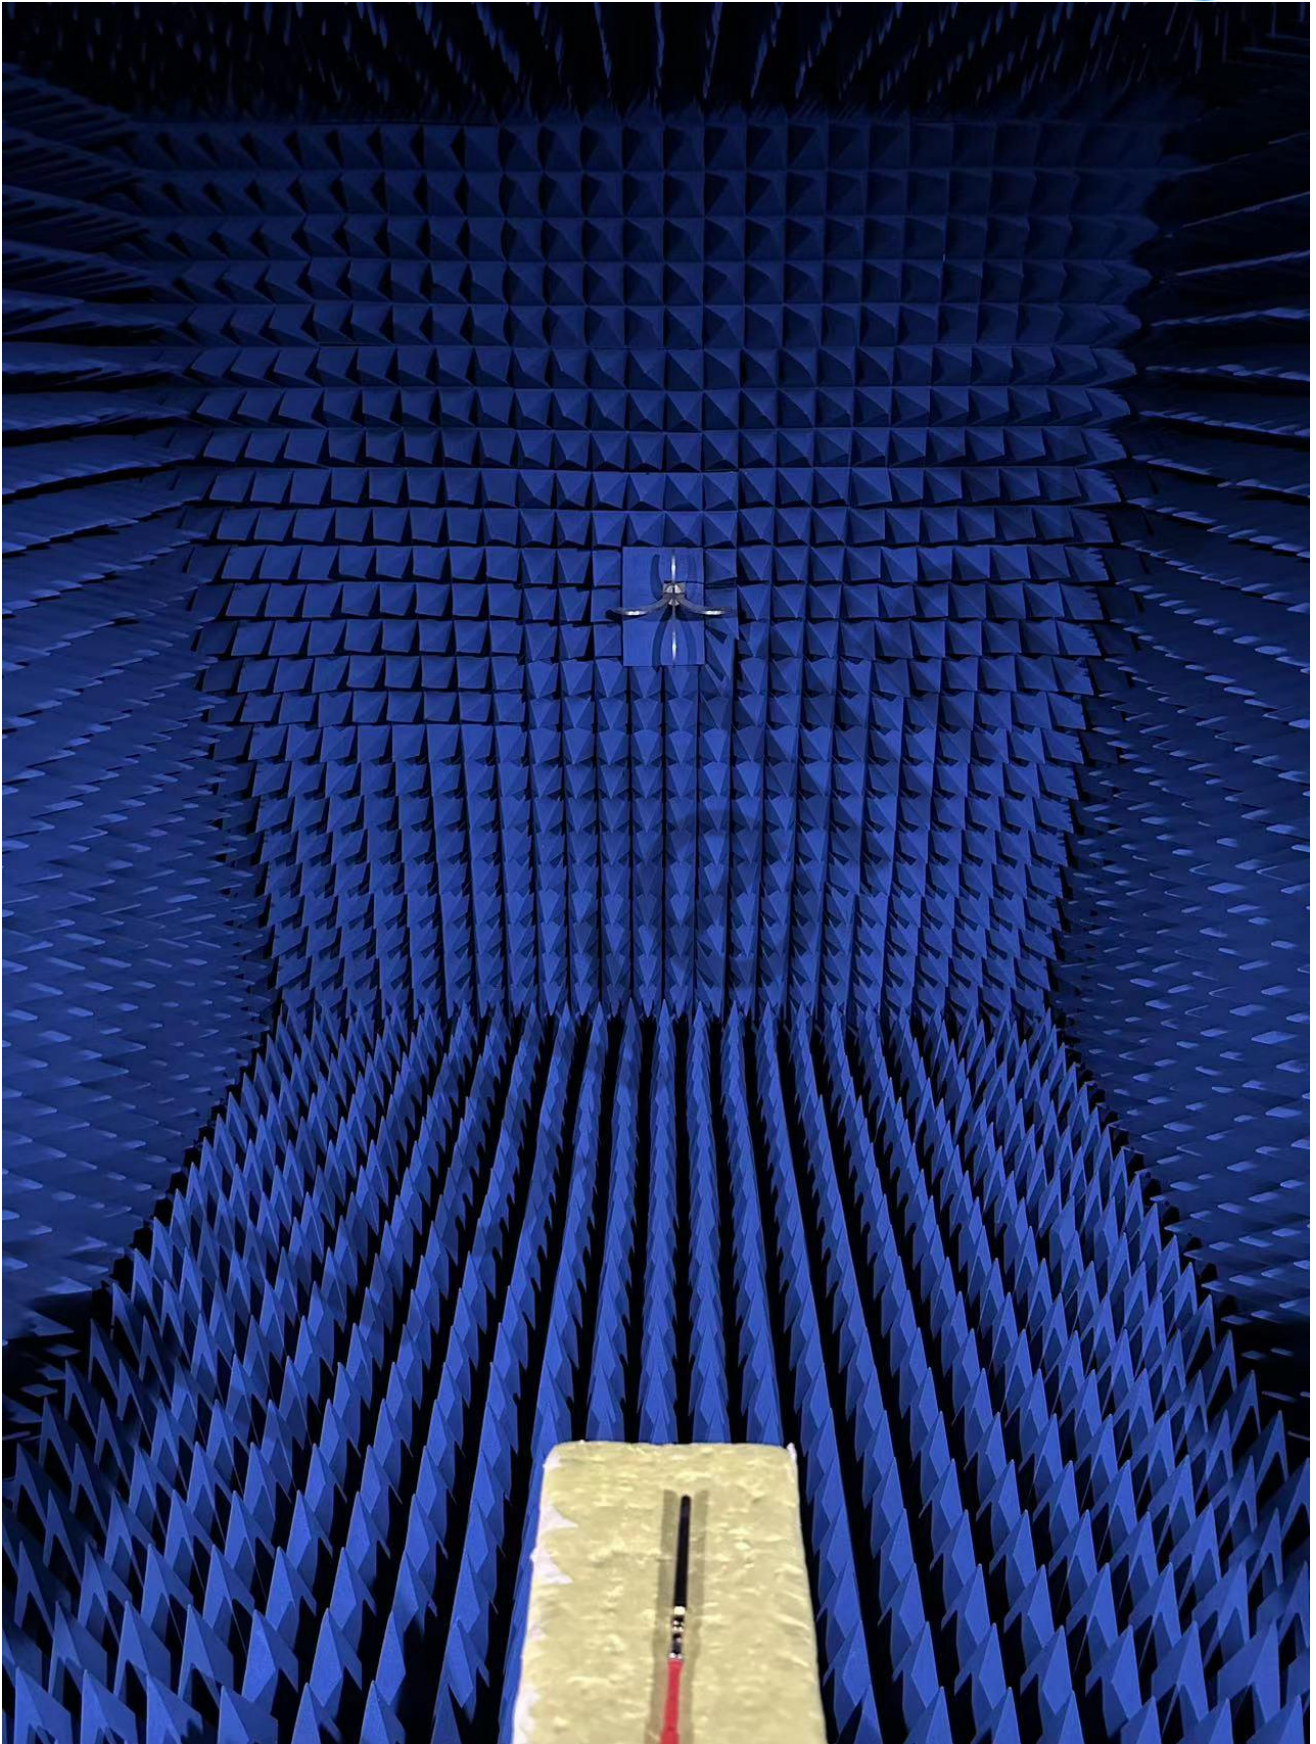

Freq (MHz)	Effi (%)	Effi (dB)	Gain (dBi)	Gain (dBd)	Max (dB)	Min (dB)	Directivity (dBi)	AttH (dB)	AttV (dB)
2400	74.52	-1.28	1.58	-0.57	1.58	-19.38	2.86	46.33	46.47
2410	78.24	-1.07	1.77	-0.38	1.77	-20.18	2.84	46.51	46.7
2420	79.25	-1.01	2.02	-0.13	2.02	-19.82	3.03	46.33	46.5
2430	81.91	-0.87	2.28	0.13	2.28	-22.71	3.15	46.7	46.83
2440	79.62	-0.99	2.16	0.01	2.16	-23.79	3.15	46.75	46.79
2450	68.45	-1.65	1.34	-0.81	1.34	-29.18	2.99	46.2	46.36
2460	75.94	-1.2	1.65	-0.5	1.65	-27.35	2.84	46.66	46.73
2470	78.24	-1.07	1.66	-0.49	1.66	-27.72	2.73	46.55	46.66
2480	79.9	-0.97	1.77	-0.38	1.77	-24.87	2.75	46.99	47.17
2490	80.06	-0.97	1.83	-0.32	1.83	-23.8	2.8	46.73	46.8
2500	76.3	-1.17	1.79	-0.36	1.79	-22.81	2.96	46.67	46.84

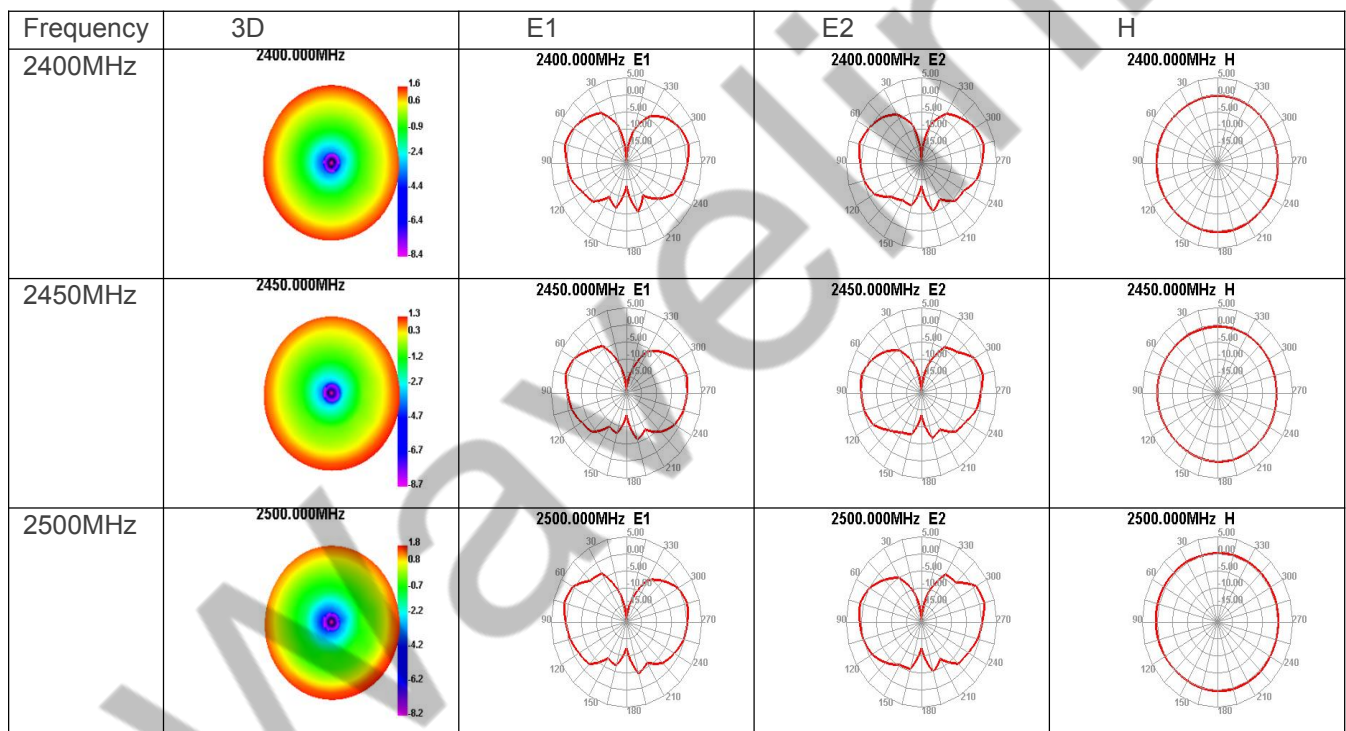

5 Product Size

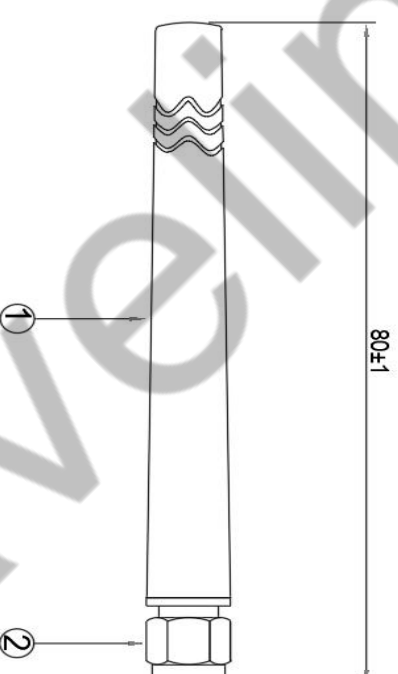A	B	C	D	E	F	G																																																								
						<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <th>REV</th> <th>DATE</th> <th>DESCRIPTION</th> </tr> <tr> <td>XI</td> <td>2021.07.30</td> <td></td> </tr> </table>	REV	DATE	DESCRIPTION	XI	2021.07.30																																																			
REV	DATE	DESCRIPTION																																																												
XI	2021.07.30																																																													
Specification: Frequency Range: 2.4-2.5GHz Impedance: 50Ω VSWR: 2.0 max Gain: 2 dBi																																																														
<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td colspan="2" style="text-align: center;">CUSTOMER'S SIGNATURE</td> <td colspan="2" style="text-align: center;">APPROVED</td> <td colspan="2" style="text-align: center;">CUSTOMER:</td> <td colspan="2" style="text-align: center;">PART NO. :</td> </tr> <tr> <td colspan="2" style="text-align: center;">XX, ±3.0</td> <td colspan="2" style="text-align: center;">X, ±2.0</td> <td colspan="2" style="text-align: center;">X, ±1.0</td> <td colspan="2" style="text-align: center;">X, ±0.5</td> </tr> <tr> <td colspan="2" style="text-align: center;">XX</td> <td colspan="2" style="text-align: center;">X</td> <td colspan="2" style="text-align: center;">XX</td> <td colspan="2" style="text-align: center;">XXX</td> </tr> <tr> <td colspan="2" style="text-align: center;">± 0.1</td> <td colspan="2" style="text-align: center;">± 0.5</td> <td colspan="2" style="text-align: center;">± 1.0</td> <td colspan="2" style="text-align: center;">± 2.0</td> </tr> <tr> <td colspan="2" style="text-align: center;">DRAWING</td> <td colspan="2" style="text-align: center;">CHECKED</td> <td colspan="2" style="text-align: center;">PARTNAME:</td> <td colspan="2" style="text-align: center;">WAVE/INK P/NO. : WL-2400E808</td> </tr> <tr> <td colspan="2" style="text-align: center;">REV</td> <td colspan="2" style="text-align: center;">UNIT</td> <td colspan="2" style="text-align: center;">SHEET</td> <td colspan="2" style="text-align: center;">1/1</td> </tr> <tr> <td colspan="2" style="text-align: center;">XI</td> <td colspan="2" style="text-align: center;">m/m</td> <td colspan="2" style="text-align: center;">1/1</td> <td colspan="2" style="text-align: center;">1/1</td> </tr> </table>							CUSTOMER'S SIGNATURE		APPROVED		CUSTOMER:		PART NO. :		XX, ±3.0		X, ±2.0		X, ±1.0		X, ±0.5		XX		X		XX		XXX		± 0.1		± 0.5		± 1.0		± 2.0		DRAWING		CHECKED		PARTNAME:		WAVE/INK P/NO. : WL-2400E808		REV		UNIT		SHEET		1/1		XI		m/m		1/1		1/1	
CUSTOMER'S SIGNATURE		APPROVED		CUSTOMER:		PART NO. :																																																								
XX, ±3.0		X, ±2.0		X, ±1.0		X, ±0.5																																																								
XX		X		XX		XXX																																																								
± 0.1		± 0.5		± 1.0		± 2.0																																																								
DRAWING		CHECKED		PARTNAME:		WAVE/INK P/NO. : WL-2400E808																																																								
REV		UNIT		SHEET		1/1																																																								
XI		m/m		1/1		1/1																																																								
<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <th>NO</th> <th>DESCRIPTION</th> <th>QTY</th> <th>REMARK</th> </tr> <tr> <td>2</td> <td>CONN</td> <td>1</td> <td></td> </tr> <tr> <td>1</td> <td>Stem Casing</td> <td>1</td> <td></td> </tr> </table>							NO	DESCRIPTION	QTY	REMARK	2	CONN	1		1	Stem Casing	1																																													
NO	DESCRIPTION	QTY	REMARK																																																											
2	CONN	1																																																												
1	Stem Casing	1																																																												
昆山市海宜电子有限公司 Kunshan Wavelink Electronics Co., Ltd.																																																														

6 Others

DESCRIPTION	SPECIFICATION
Temperature /Humidity cycling	1, The device under test is kept for 30 mins in an environment with a temperature of -40 °C. 2, Kept for 4 Hours in an environment with a temperature of 8cthe conditions are stabilized at room temperature. 3, Parts should meet RF spec before and after test. 4, No cosmetic problem(No soldering problem;No adhesion problem of glue).
Temperature Shock	1, The device under test at -40 °C ⇌ 125 °C by 100 cycles, Dwell of 30 mins, transition time between Dwell 30 secs (~ 61 mins / cycle) and each item should be measured after exposing them in normal temperature and humidity for 24 h. 2, Parts should meet RF spec before and after test. 3, No cosmetic problem(No soldering problem; No adhesion problem of glue).
High Temperature	1, Temperature:125°C, time:1008 hours 2, There is no substantial obstruction to air flow across and around the samples, and the samples are not touching each other 3, Parts should meet RF spec before and after test. 4, No cosmetic problem(No soldering problem; No adhesion problem of glue).
Salt mist test	1, The device under test is exposed to a spray of a 5% (by volume) resolution of NACL in water for 2 hours. Thereafter the device under test is left for 1 week in room temperature at a relative humidity of 95%. The cycle is repeated until a total of 2 cycles have been completed. Here after the conditions are stabilized at room temperature. 2, Parts should meet RF spec before and after test. 3, No visible corrosion. Discoloration accept.