

# Antenna Specifications

At Wavelink, our aim is to provide timely and comprehensive services to our customers. If you require any assistance, please contact our headquarters:

2nd Floor, Building D, No. 88 Tongqiu Road, ZhangPu Town, Kunshan City, Jiangsu Province, China

Tel: +86-512-57449488

Email: [sales@kswavelink.com](mailto:sales@kswavelink.com)

Wavelink Certifications:



Wavelink Partners:

**Skyworth NARI**

**flex**

 **HUAWEI**

 **VVDN  
TECHNOLOGIES**

**Tenda Infinova**

**dji**

**Hikvision**

**JABIL**

# Catalogue

1	Product Description .....	3
2	Product Features .....	3
3	Product Specifications .....	3
4	Overall Performance .....	4
5	Product Size .....	5
6	Others .....	6

Wavelink

## 1 Product Description

This wavelink antenna covers 1575.42MHz.

## 2 Product Features

Easy to install  
High efficiency  
Removable



## 3 Product Specifications

### Passive Electrical Specifications

Frequency Range	1575.42MHz
Impedance	50 $\Omega$


VSWR	<1.5
Gain	≤28 dBi
Polarization Type	RHCP

### Mechanical Specifications

Antenna Size	6mm ×16mm×6.5mm
Connector Type	I-PEX
Operating voltage	3.3 V
Current	3-6 mA
Working Temperature	-30 °C to +70 °C

## 4 Overall Performance

KEYSIGHT VNA Network Analyzer E5071C 100 kHz – 8.5 GHz

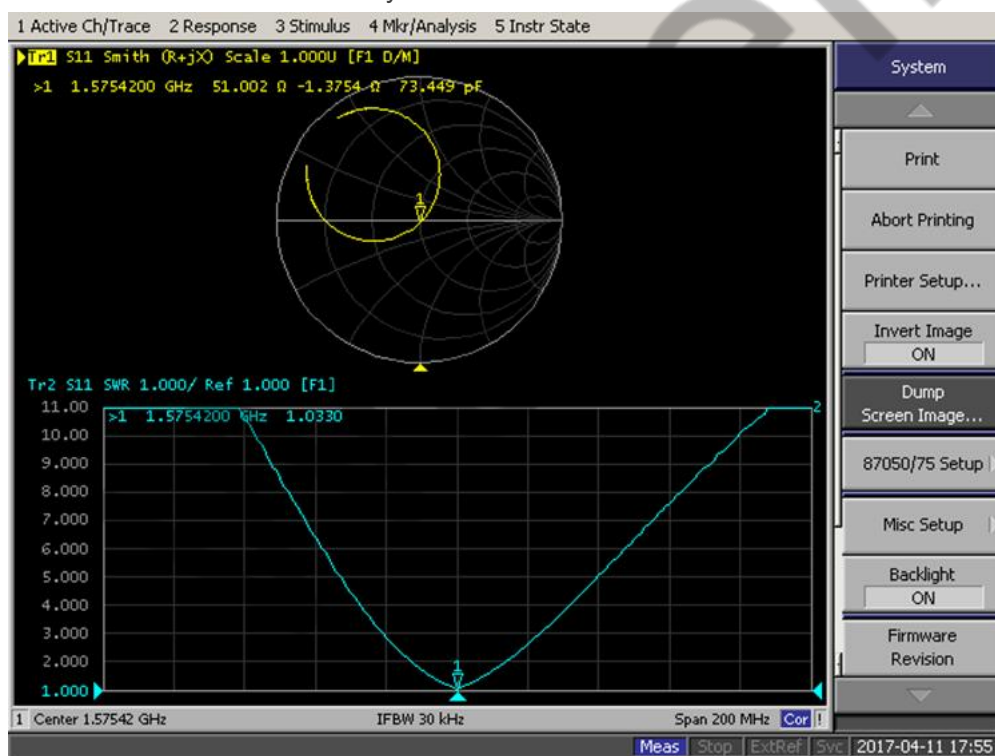



## 6 Others

DESCRIPTION	SPECIFICATION
Temperature /Humidity cycling	<p>1, The device under test is kept for 30 mins in an environment with a temperature of -40 °C.</p> <p>2, Kept for 4 Hours in an environment with a temperature of 8cthe conditions are stabilized at room temperature.</p> <p>3, Parts should meet RF spec before and after test.</p> <p>4, No cosmetic problem(No soldering problem;No adhesion problem of glue).</p>
Temperature Shock	<p>1, The device under test at -40 °C ⇌125 °C by 100 cycles, Dwell of 30 mins, transition time between Dwell 30 secs (~ 61 mins / cycle) and each item should be measured after exposing them in normal temperature and humidity for 24 h.</p> <p>2, Parts should meet RF spec before and after test.</p> <p>3, No cosmetic problem(No soldering problem; No adhesion problem of glue).</p>
High Temperature	<p>1, Temperature:125°C, time:1008 hours</p> <p>2, There is no substantial obstruction to air flow across and around the samples, and the samples are not touching each other</p> <p>3, Parts should meet RF spec before and after test.</p> <p>4, No cosmetic problem(No soldering problem; No adhesion problem of glue).</p>
Salt mist test	<p>1, The device under test is exposed to a spray of a 5% (by volume) resolution of NACL in water for 2 hours. Thereafter the device under test is left for 1 week in room temperature at a relative humidity of 95%. The cycle is repeated until a total of 2 cycles have been completed. Here after the conditions are stabilized at room temperature.</p> <p>2, Parts should meet RF spec before and after test.</p> <p>3, No visible corrosion. Discoloration accept.</p>