

Antenna Specifications

At Wavelink, our aim is to provide timely and comprehensive services to our customers. If you require any assistance, please contact our headquarters:

2nd Floor, Building D, No. 88 Tongqiu Road, Zhangpu Town, Kunshan City, Jiangsu Province, China

Tel: +86-512-57449488

Email: sales@kswavelink.com

Wavelink Certifications:



Wavelink Partners:

Skyworth **NARI**

flex

 **HUAWEI**

 **VVDN**
TECHNOLOGIES

Tenda **Infinova**

dji

Hikvision

JABIL

Catalogue

1	Product Description	3
2	Product Features	3
3	Product Specifications	3
4	Overall Performance	4
5	Product Size	6
6	Others	7

1 Product Description

This wavelink antenna covers 915MHz.

2 Product Features

Easy to install
High efficiency
Removable



3 Product Specifications

Passive Electrical Specifications

Frequency Range	915 MHz
Input Impedance	50 Ω
VSWR	≤ 2
Gain	≤ 1 dBi

Polarization Type Linear

Mechanical Specifications

Antenna Size 195mm ×11.7mm


Connector Type SMA


Working Temperature -40 °C to +85 °C

Radome Color Black


4 Overall Performance

KEYSIGHT VNA Network Analyzer E5071C 100 kHz – 8.5 GHz

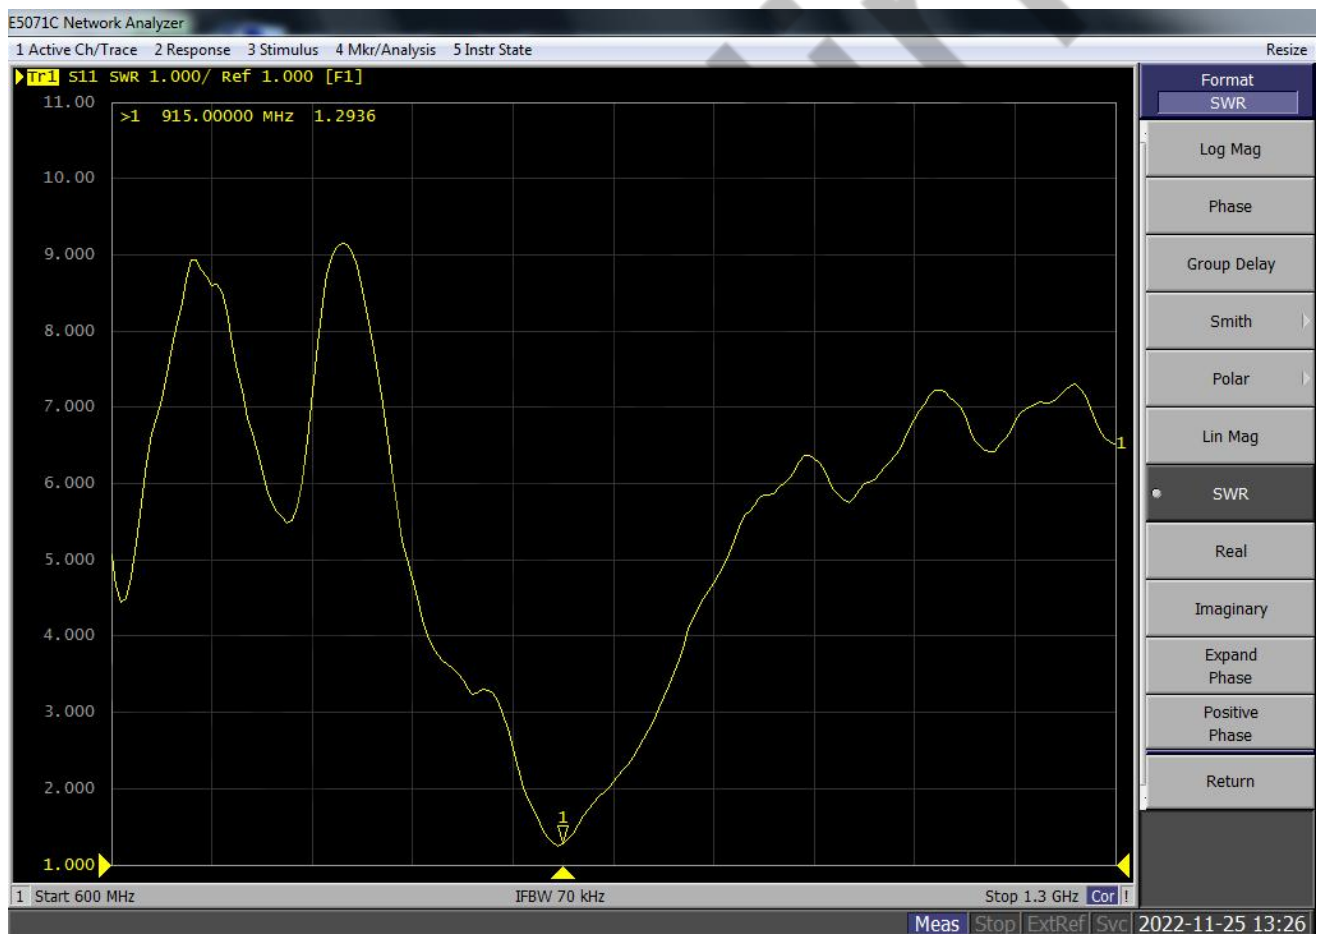

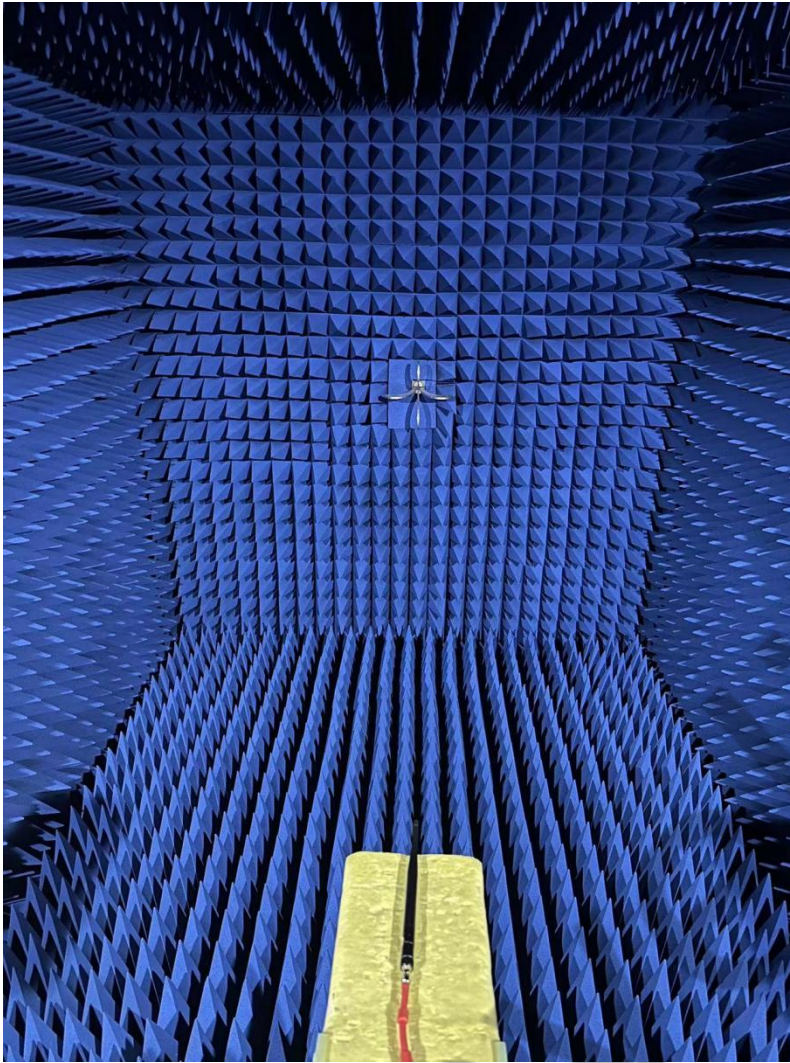

Freq (MHz)	Effi (%)	Effi (dB)	Gain (dBi)	Gain (dBd)	Max (dB)	Min (dB)	Directivity (dBi)	Beamwidth (3dB)	AttH (dB)	AttV (dB)
900	65.74	-1.82	0.05	-2.1	0.05	-19.89	1.87	60	39.82	39.71
905	67.79	-1.69	0.15	-2	0.15	-18.6	1.83	60	39.98	39.85
910	68.19	-1.66	0.17	-1.98	0.17	-19.31	1.83	75	40.04	39.93
915	68.74	-1.63	0.25	-1.9	0.25	-19.43	1.88	60	40.14	40.04
920	68.6	-1.64	0.32	-1.83	0.32	-19.11	1.96	60	40.17	40.07

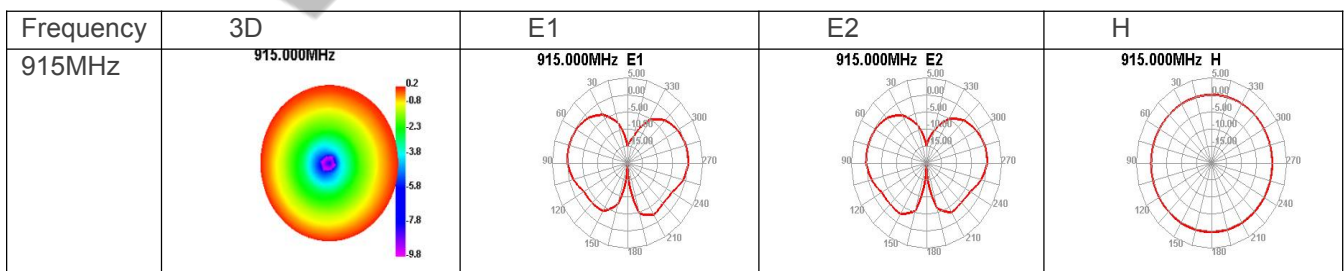

5 Product Size

A		B		C		D		E		F		G	
REV		DATE		DESCRIPTION									
X1													

195±2

6.2

11.7

172±2

Specification:

Frequency Range: 915MHz

Free space VSWR: <2

Impedance: 50 Ω

APPROVED				CUSTOMER:			
X.	± 2.0	CHECKED		PARTNAME: Antenna Assembly			
X	± 1.0						
XX	± 0.5	DRAWING					
XXX	± 0.1	WAY					
		REV		UNIT		SHEET :	
		X1		m/m		1/1	

昆山市海壹电子有限公司

Kunshan WaveLink Electronics Co.,Ltd.

CUSTOMER'S SIGNATURE

6 Others

DESCRIPTION	SPECIFICATION
Temperature /Humidity cycling	1, The device under test is kept for 30 mins in an environment with a temperature of -40 °C. 2, Kept for 4 Hours in an environment with a temperature of 8cthe conditions are stabilized at room temperature. 3, Parts should meet RF spec before and after test. 4, No cosmetic problem(No soldering problem;No adhesion problem of glue).
Temperature Shock	1, The device under test at -40 °C ⇌ 125 °C by 100 cycles, Dwell of 30 mins, transition time between Dwell 30 secs (~ 61 mins / cycle) and each item should be measured after exposing them in normal temperature and humidity for 24 h. 2, Parts should meet RF spec before and after test. 3, No cosmetic problem(No soldering problem; No adhesion problem of glue).
High Temperature	1, Temperature:125°C, time:1008 hours 2, There is no substantial obstruction to air flow across and around the samples, and the samples are not touching each other 3, Parts should meet RF spec before and after test. 4, No cosmetic problem(No soldering problem; No adhesion problem of glue).
Salt mist test	1, The device under test is exposed to a spray of a 5% (by volume) resolution of NACL in water for 2 hours. Thereafter the device under test is left for 1 week in room temperature at a relative humidity of 95%. The cycle is repeated until a total of 2 cycles have been completed. Here after the conditions are stabilized at room temperature. 2, Parts should meet RF spec before and after test. 3, No visible corrosion. Discoloration accept.