

Antenna

Specifications

At Wavelink, our aim is to provide timely and comprehensive services to our customers. If you require any assistance, please contact our headquarters:

2nd Floor, Building D, No. 88 Tongqiu Road, Zhangpu Town, Kunshan City, Jiangsu Province, China

Tel: +86-512-57449488

Email: sales@kswavelink.com

Wavelink Certifications:



Wavelink Partners:

Skyworth NARI

flex

 **HUAWEI**

 **VVDN**
TECHNOLOGIES

Tenda Infinova

dji

Hikvision

JABIL

Catalogue

1	Product Description	3
2	Product Features	3
3	Product Specifications	3
4	Overall Performance	4
5	Product Size	7
6	Others	8

1 Product Description

This wavelink antenna 868MHz

2 Product Features

Easy to install
High efficiency
Removable



3 Product Specifications

Passive Electrical Specifications

Frequency Range	868MHz
-----------------	--------


Input Impedance	50 Ω
VSWR	≤ 2
Gain	≤ 1 dBi
Polarization Type	Linear


Mechanical Specifications

Antenna Size	100mm $\times$ 18.5mm
Connector Type	SMA
Working Temperature	-40 $^{\circ}$ C to +85 $^{\circ}$ C
Radome Color	Black


4 Overall Performance

KEYSIGHT VNA Network Analyzer E5071C 100 kHz – 8.5 GHz

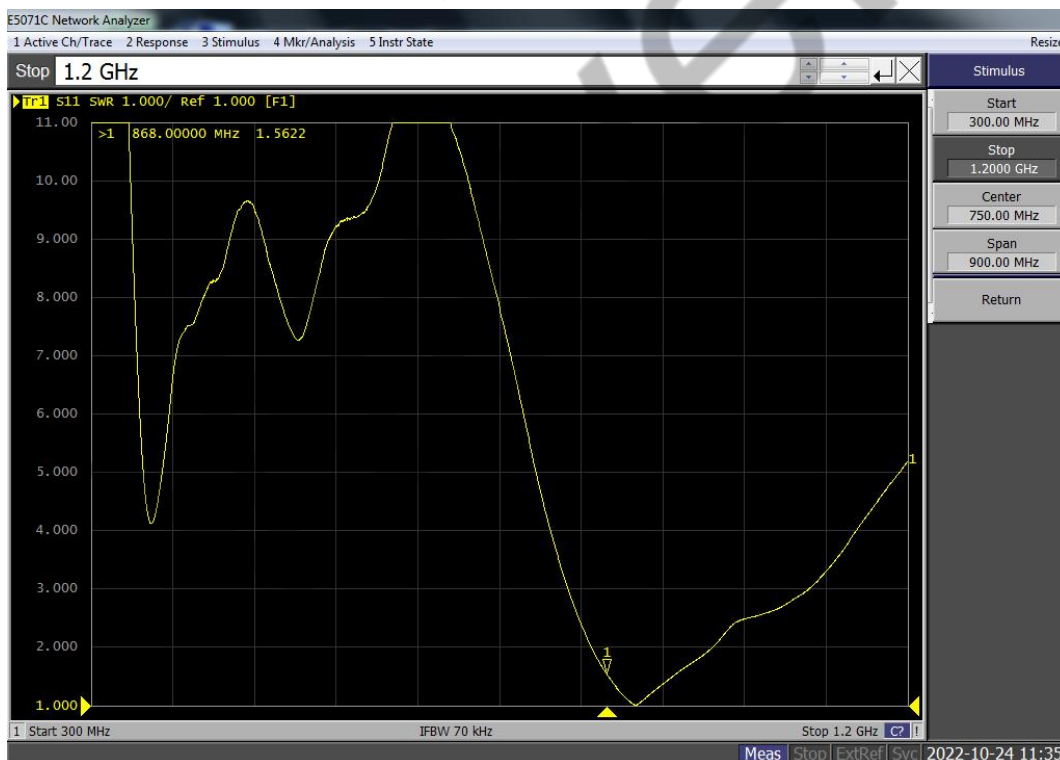


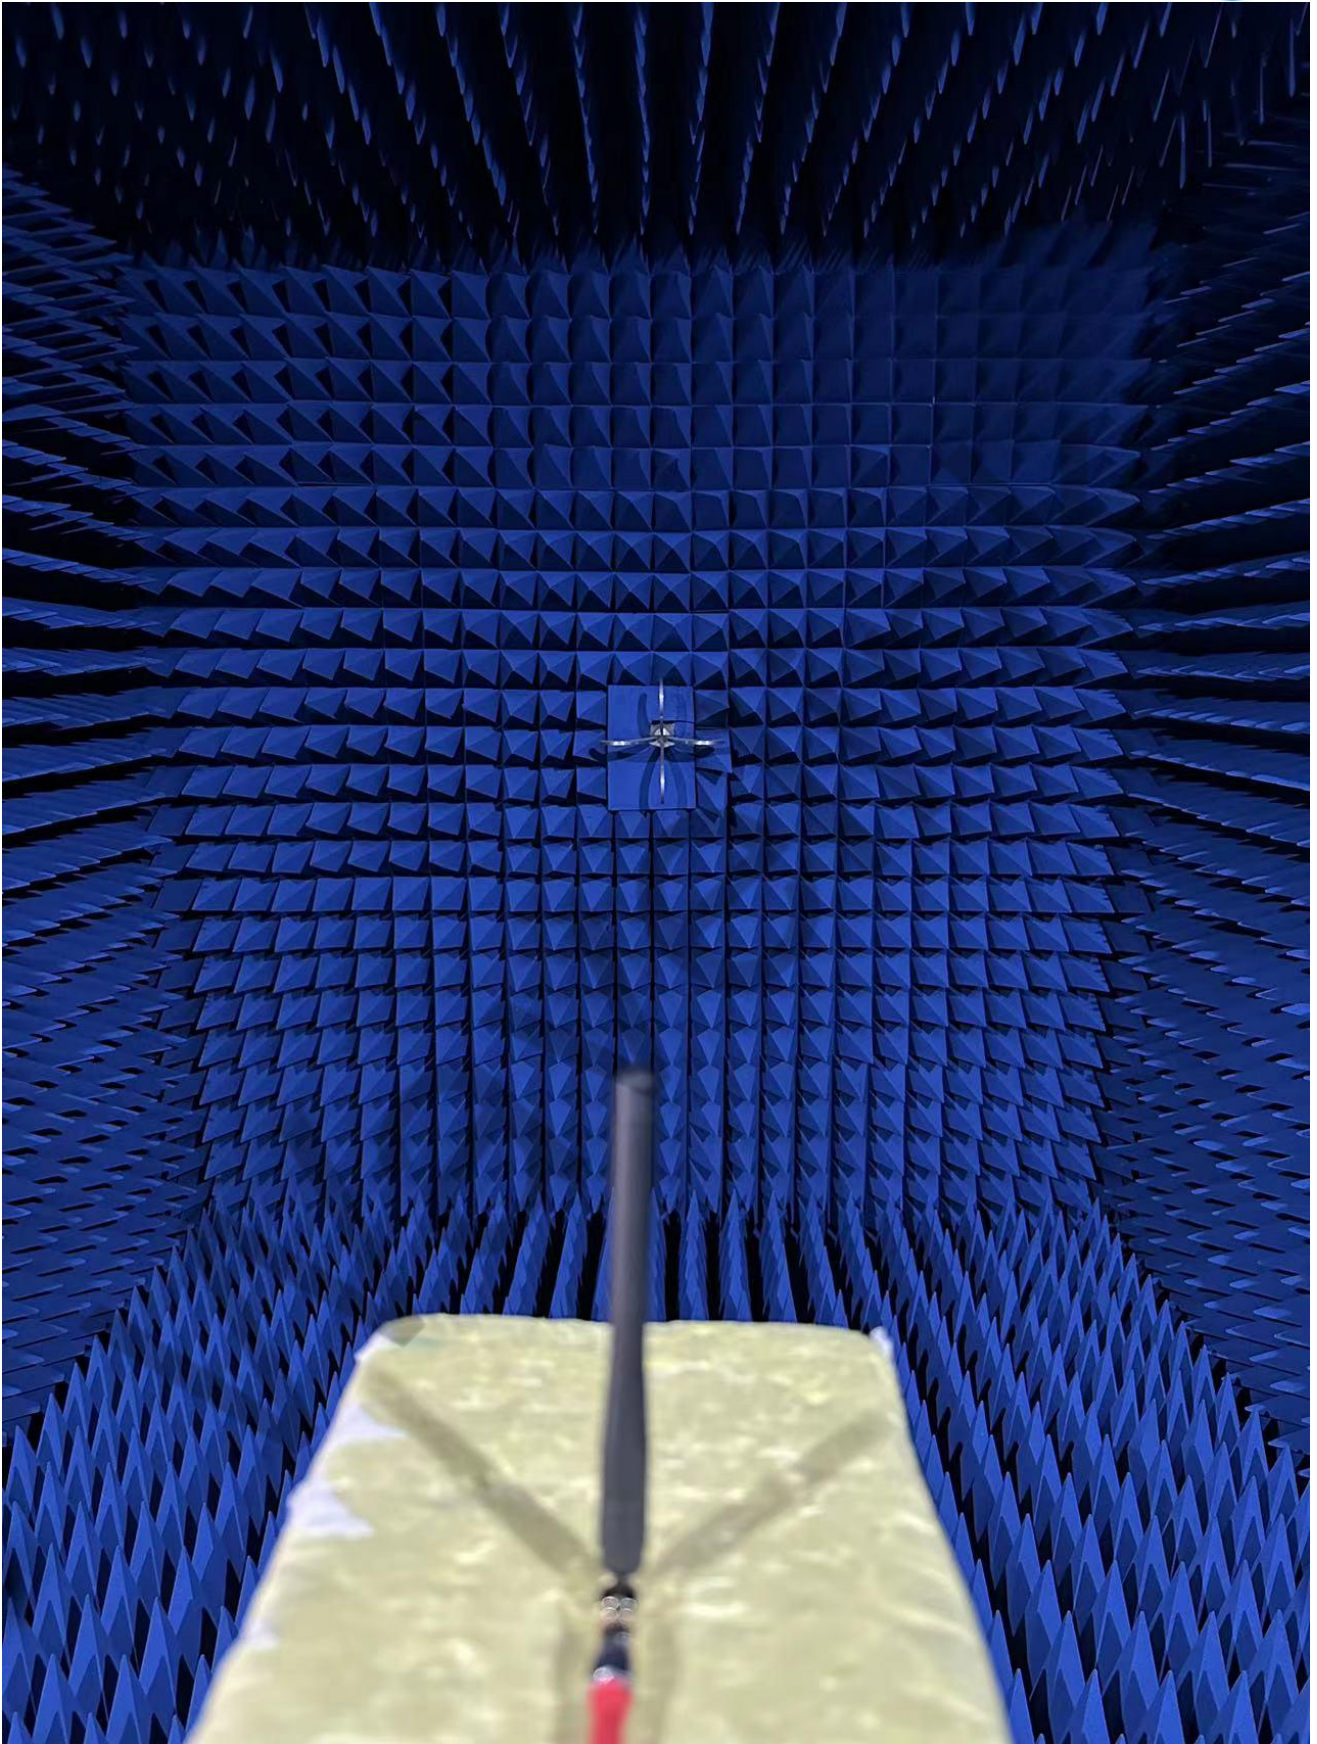

Freq (MHz)	Effi (%)	Effi (dB)	Gain (dBi)	Gain (dBd)	Max (dB)	Min (dB)	Directivity (dBi)	Beamwidth (3dB)	AttH (dB)	AttV (dB)
860	29.04	-5.37	-0.9	-3.05	-0.9	-20.48	5.37	30	39.07	38.78
861	28.68	-5.42	-0.99	-3.14	-0.99	-20.47	5.42	30	39.08	38.78
862	28.35	-5.47	-1.09	-3.24	-1.09	-20.44	5.47	30	39.08	38.78
863	28.11	-5.51	-1.16	-3.31	-1.16	-20.39	5.51	30	39.09	38.78
864	28	-5.53	-1.23	-3.38	-1.23	-20.34	5.53	30	39.1	38.77
865	28.01	-5.53	-1.27	-3.42	-1.27	-20.31	5.53	30	39.1	38.77
866	28.14	-5.51	-1.3	-3.45	-1.3	-20.21	5.51	30	39.11	38.77
867	28.37	-5.47	-1.31	-3.46	-1.31	-20.15	5.47	30	39.11	38.77
868	28.62	-5.43	-1.32	-3.47	-1.32	-20.03	5.43	30	39.12	38.77
869	28.86	-5.4	-1.33	-3.48	-1.33	-19.83	5.4	30	39.12	38.77
870	29.01	-5.37	-1.35	-3.5	-1.35	-19.62	5.37	30	39.12	38.77

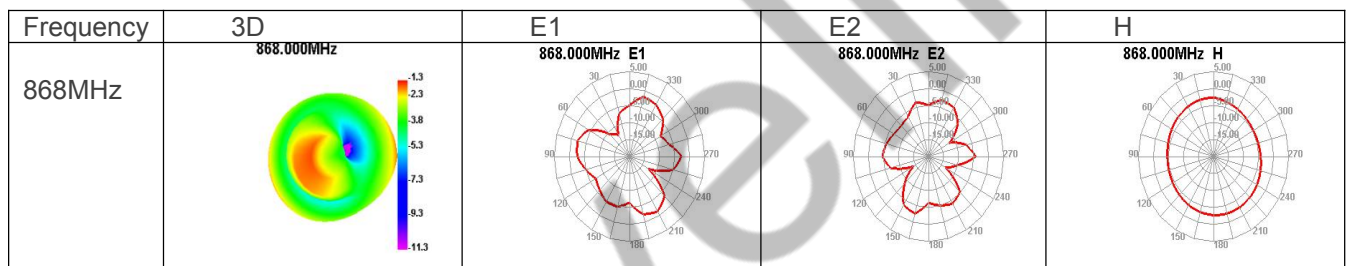

5 Product Size

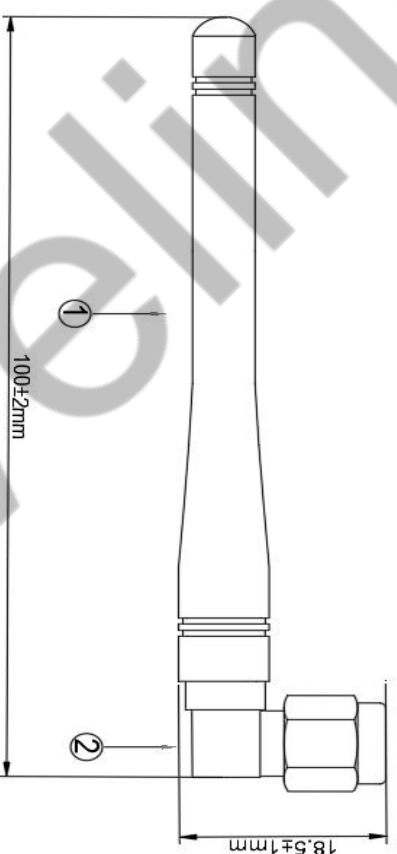A		B		C		D		E		F		G																																																																																									
										REV		DATE		DESCRIPTION																																																																																							
										2022.5.27																																																																																											
Specification: Frequency Range: 868MHz Impedance: 50Ω VSWR: 2.0 max 																																																																																																					
<table border="1"><thead><tr><th colspan="2">XX.</th><th colspan="2">±5.0</th><th colspan="2">APPROVED</th><th colspan="2">CUSTOMER:</th><th colspan="2"></th><th colspan="2"></th><th colspan="2"></th></tr></thead><tbody><tr><td colspan="2">X.</td><td colspan="2">±3.0</td><td colspan="2">CHECKED</td><td colspan="2">PART NO.:</td><td colspan="2"></td><td colspan="2"></td><td colspan="2"></td></tr><tr><td colspan="2">.X</td><td colspan="2">±1.0</td><td colspan="2"></td><td colspan="2">PART NAME:</td><td colspan="2"></td><td colspan="2"></td><td colspan="2"></td></tr><tr><td colspan="2">.XX</td><td colspan="2">±0.5</td><td colspan="2"></td><td colspan="2">WAVELINK P/NO.:</td><td colspan="2">WL-868E100</td><td colspan="2"></td><td colspan="2"></td></tr><tr><td colspan="2">.XXX</td><td colspan="2">±0.1</td><td colspan="2">DRAWING</td><td colspan="2">FILE:</td><td colspan="2"></td><td colspan="2"></td><td colspan="2"></td></tr><tr><td colspan="2"></td><td colspan="2"></td><td colspan="2"></td><td colspan="2">SHEET: 1/1</td><td colspan="2"></td><td colspan="2"></td><td colspan="2"></td></tr></tbody></table>														XX.		±5.0		APPROVED		CUSTOMER:								X.		±3.0		CHECKED		PART NO.:								.X		±1.0				PART NAME:								.XX		±0.5				WAVELINK P/NO.:		WL-868E100						.XXX		±0.1		DRAWING		FILE:														SHEET: 1/1											
XX.		±5.0		APPROVED		CUSTOMER:																																																																																															
X.		±3.0		CHECKED		PART NO.:																																																																																															
.X		±1.0				PART NAME:																																																																																															
.XX		±0.5				WAVELINK P/NO.:		WL-868E100																																																																																													
.XXX		±0.1		DRAWING		FILE:																																																																																															
						SHEET: 1/1																																																																																															
<table border="1"><thead><tr><th colspan="2">2</th><th colspan="2">CONN</th><th colspan="2">SMA Male Right Angle</th><th colspan="2">1</th><th colspan="2"></th></tr></thead><tbody><tr><td colspan="2">1</td><td colspan="2">Antenna Body</td><td colspan="2">TPE, Black</td><td colspan="2">1</td><td colspan="2"></td></tr><tr><td colspan="2">NO</td><td colspan="2"></td><td colspan="2">DESCRIPTION</td><td colspan="2">QTY</td><td colspan="2">REMARK</td></tr></tbody></table>														2		CONN		SMA Male Right Angle		1				1		Antenna Body		TPE, Black		1				NO				DESCRIPTION		QTY		REMARK																																																											
2		CONN		SMA Male Right Angle		1																																																																																															
1		Antenna Body		TPE, Black		1																																																																																															
NO				DESCRIPTION		QTY		REMARK																																																																																													
昆山市海宣电子有限公司 Kunshan Wavelink Electronics Co., Ltd.																																																																																																					

6 Others

DESCRIPTION	SPECIFICATION
Temperature /Humidity cycling	1, The device under test is kept for 30 mins in an environment with a temperature of -40 °C. 2, Kept for 4 Hours in an environment with a temperature of 8cthe conditions are stabilized at room temperature. 3, Parts should meet RF spec before and after test. 4, No cosmetic problem(No soldering problem;No adhesion problem of glue).
Temperature Shock	1, The device under test at -40 °C ⇌ 125 °C by 100 cycles, Dwell of 30 mins, transition time between Dwell 30 secs (~ 61 mins / cycle) and each item should be measured after exposing them in normal temperature and humidity for 24 h. 2, Parts should meet RF spec before and after test. 3, No cosmetic problem(No soldering problem; No adhesion problem of glue).
High Temperature	1, Temperature:125°C, time:1008 hours 2, There is no substantial obstruction to air flow across and around the samples, and the samples are not touching each other 3, Parts should meet RF spec before and after test. 4, No cosmetic problem(No soldering problem; No adhesion problem of glue).
Salt mist test	1, The device under test is exposed to a spray of a 5% (by volume) resolution of NACL in water for 2 hours. Thereafter the device under test is left for 1 week in room temperature at a relative humidity of 95%. The cycle is repeated until a total of 2 cycles have been completed. Here after the conditions are stabilized at room temperature. 2, Parts should meet RF spec before and after test. 3, No visible corrosion. Discoloration accept.